


Scheda tecnica

- * Tensione di alimentazione 230Vac 50Hz
[230Vac 60Hz - 110Vac 60Hz]
- * Assorbimento 400W
- * Prese ausiliarie 230Vac 50Hz 200W
[230Vac 60Hz - 110Vac 60Hz]
- * Alimentazione tavolo di lavoro
solo per 40.055.00
3-12Vac 230Vac 50Hz 200W
[230Vac 60Hz - 110Vac 60Hz]

Technical data

- * Power supply 230Vac 50Hz
[230Vac 60Hz - 110Vac 60Hz]
- * Power consumption 400W
- * Auxiliary outputs 230Vac 50Hz 200W
[230Vac 60Hz - 110Vac 60Hz]
- * Working table voltage
only for 40.055.00
3-12Vac 230Vac 50Hz 200W
[230Vac 60Hz - 110Vac 60Hz]

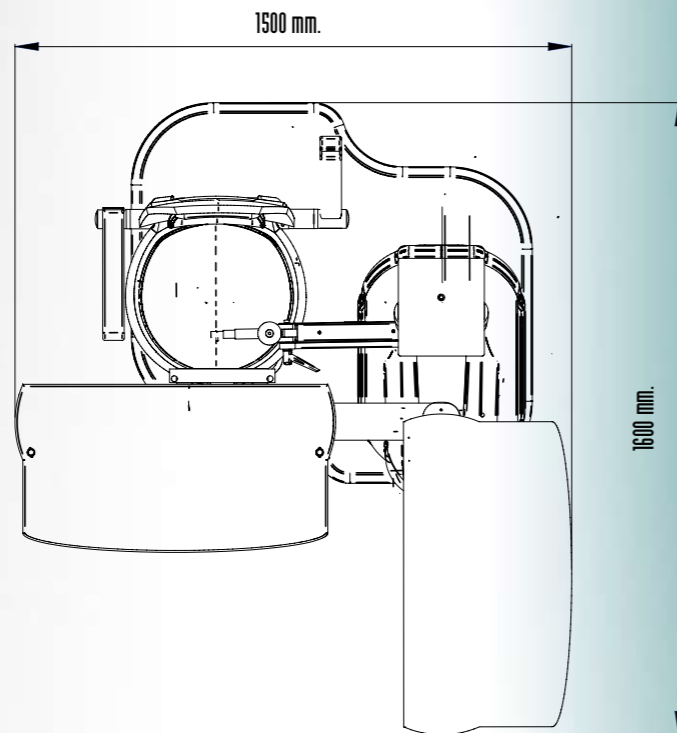

CODE
10.120.00

Conforme alle direttive:

- 98/37/CEE e successive modifiche
- 89/336/CEE e successive modifiche
- 73/23/CEE e successive modifiche
- 93/42/CEE e successive modifiche

Comply to the directives:

- 98/37/CEE and following modifications
- 89/336/CEE and following modifications
- 73/23/CEE and following modifications
- 93/42/CEE and following modifications



MeccanotticaMazza^{srl}
ambienti oftalmici

20048 CARATE BRIANZA (MI) - ITALIA - VIA TIZIANO, 9
TEL.++39.0362.902185 r.a. FAX++39.0362.903306
info@meccanotticamazza.it
www.meccanotticamazza.it



CONFORME ALLA MARCATURA



MeccanotticaMazza^{srl}
ambienti oftalmici



Supporto fisso e supporto snodato porta monitor [optional]
Fix and movable monitor supports [optional]



Riunito con strumenti
Unit with instruments



Riunito con piano traslabile per 2 strumenti con sistema di bloccaggio in ogni posizione
Unit with sliding instruments table with lock system in all positions



Modulo per forottero con movimento manuale [optional]
Manual phoropter arm module [optional]



Pannello comandi digitale e supporto strumenti a mano
Digital control panel and hand instruments support



Spot aggiuntivo da colonna [optional]
Extra spot light [optional]